

-----  
ai ri gami . net  
MODEL BY REQUEST

EasyJet Swi tzerl and

File created Jul 18, 2004  
=====

Thank you for your order. Please find attached the following models:


1. 3G0405488 : EasyJet Swi tzerl and : Boei ng 737-300 : Swi ss Fl ag c/s
  2. 3G0405489 : EasyJet Swi tzerl and : Boei ng 737-300 : TEA Swi tzerl and Hybri d c/s
- 

The Ai ri gami . net concept and desi gns are Copyri ght © 2002-2004 James Messner.

Ai rline brandnames and logos are used for educational , i nformative and recreational purposes only and remain the trade mark and copyright property of their owners. Any unauthorized use of Ai ri gami desi gns and i nfringement of copyright and trade marks may be subject to legal action by the copyright or trade mark owners in the United States of America or other jurisdictions where such i nfringements may take place. Such i nfringements may include – but are not limited to – the unauthorized reproduction of Ai ri gami desi gns or ai rline logos for profit or other gain. Ai ri gami desi gns are offered free of charge for download and construction of models. Any other use is strictly prohibited. Ai ri gami models and desi gns may not be sold for monetary or other profit under any circumstances unless permission is sought and received from the Ai ri gami Board.

For further i nformation, please contact us at [admin@ai ri gami . net](mailto:admin@airigami.net).





=====

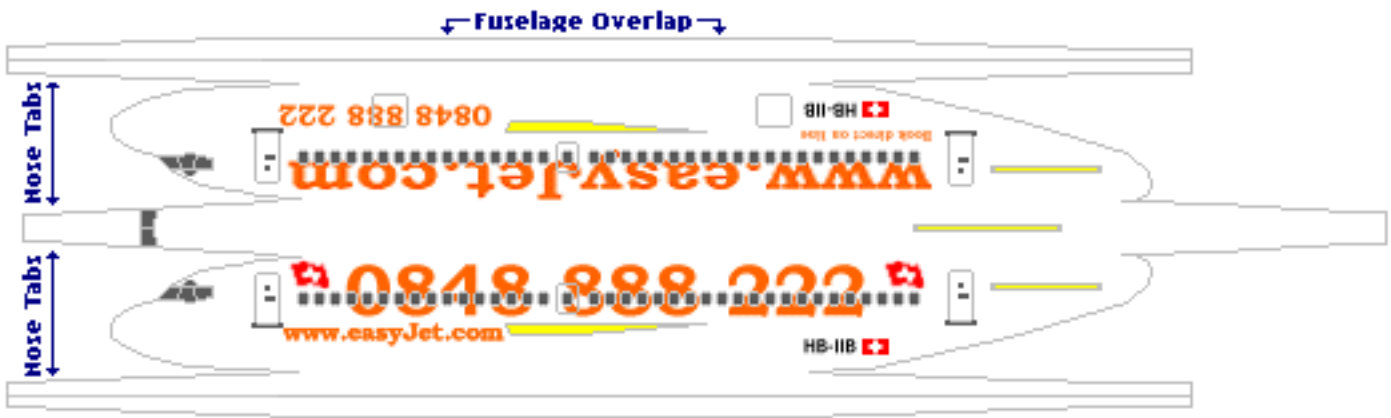

**Fuselage Underlap**

Roll fuselage and attach such that the Fuselage Overlap sits on top of the Fuselage Underlap. Close ends of fuselage by attaching the Tabs along the contours of the nose and rear fuselage.

**Bottom Wings.**  
Fold Bottom sections under the top section. Make two almost parallel folds that meet at end of wing such that there is a solid leading edge to the wing. Insert wing section through slits in mid-fuselage.

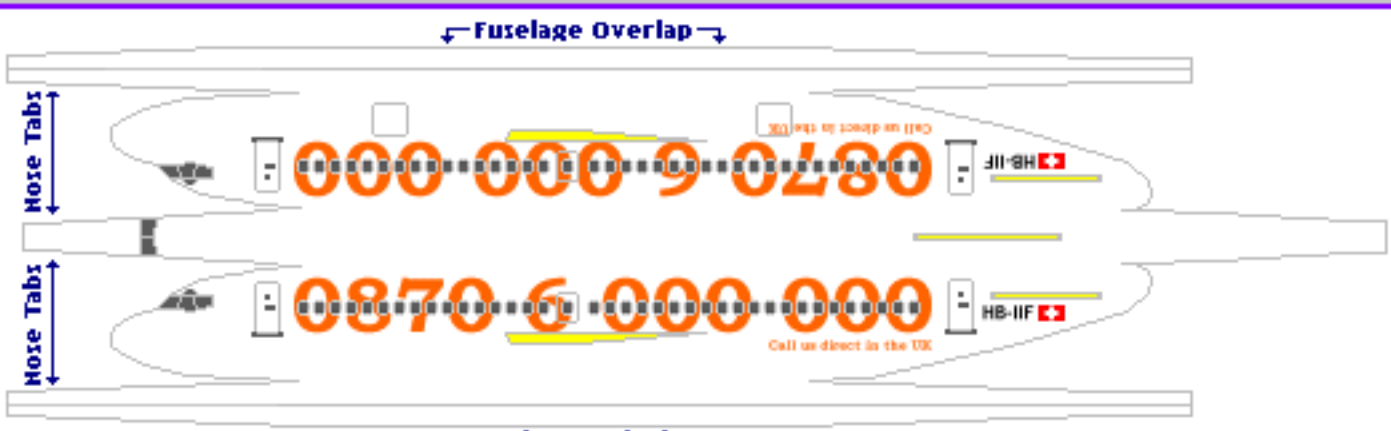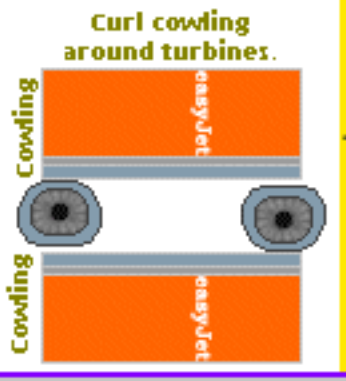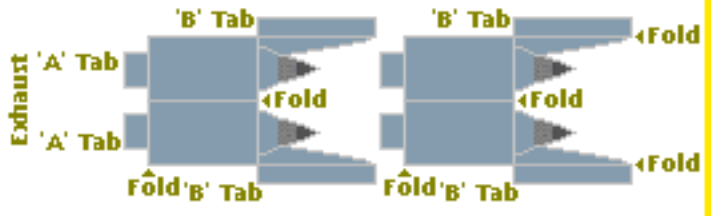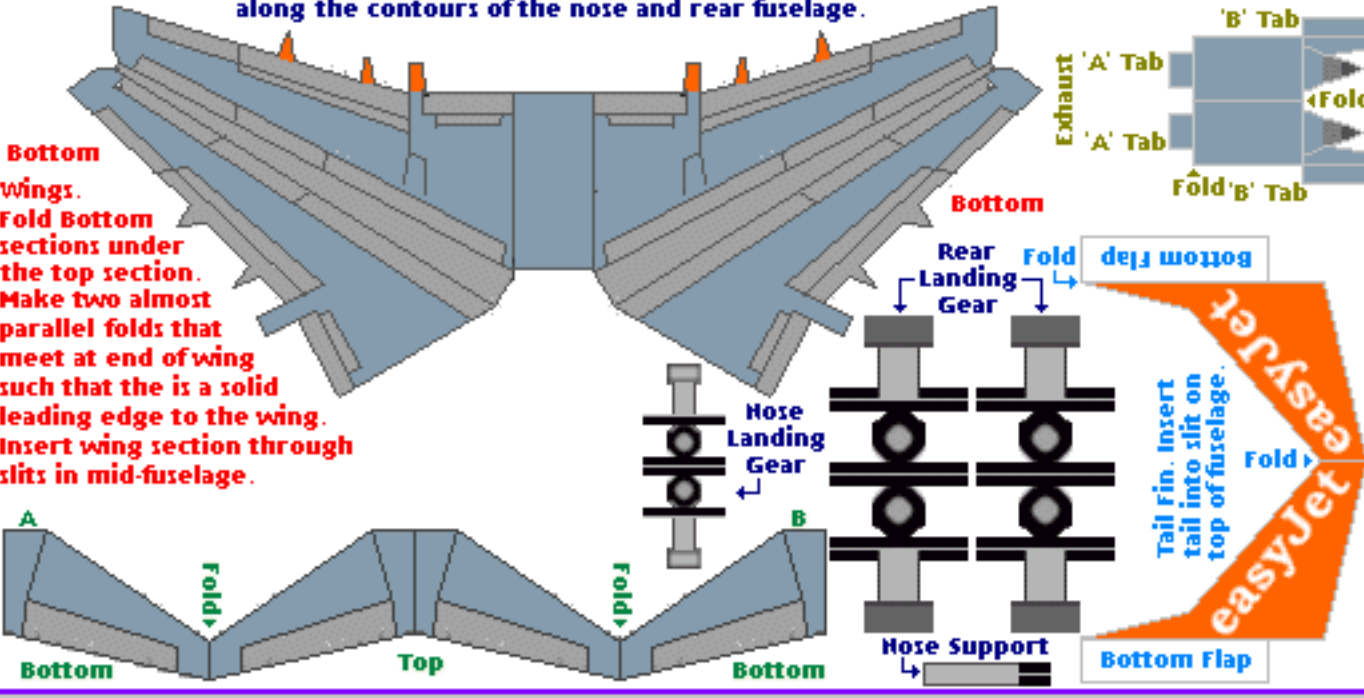

**Fuselage Underlap**

Roll fuselage and attach such that the Fuselage Overlap sits on top of the Fuselage Underlap. Close ends of fuselage by attaching the Tabs along the contours of the nose and rear fuselage.

**Bottom Wings.**  
Fold Bottom sections under the top section. Make two almost parallel folds that meet at end of wing such that there is a solid leading edge to the wing. Insert wing section through slits in mid-fuselage.

